




PYRO-SAFE® Joint sealing system FLAMMOTECT-A

Versatile joint sealing system made of mineral fibre products and ablative fire protection coating.

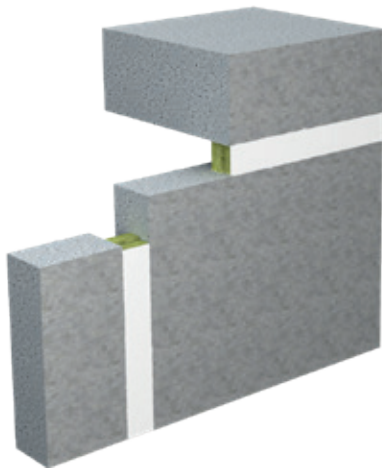

Fire resistance class

max. EI 120 acc. to EN 13501-2

Field of Application

- Joints between solid walls, between floors and between walls and floors

System data

Certificate of usability		ETA-18/0237
Thickness structural element	Wall	≥ 100
	Floor	≥ 150
Maximum sealing size	Wall	Joint width ≤ 200
	Floor	Joint width ≤ 200

All specifications in mm

Products



PYRO-SAFE® FLAMMOTECT-A

Fire protection coating

Coating

12,5 kg Pail - Art. no. 01155101

15 kg Pail - Art. no. 01155105

Solid emulsion

12,5 kg Pail - Art. no. 01155106

15 kg Pail - Art. no. 01155107

Filler

12,5 kg Pail - Art. no. 01155104

15 kg Pail - Art. no. 01155109



Mineral wool

Bag of 10 kg - Art. no. 01183000



“Klimarock” lamella mat

Roll of 3.05 m² - Art. no. 01187100

Please contact us for further information:

✉ Information: global@svt.de Orders: order@svt.de
☎ +49 4105-40 90-0